

LH-tool® 5166

Board Material


Polyurethane Tooling Board for Tools and Molds

PHYSICAL FEATURES

Very easily machined
Good temperature resistance
High impact and good edge strength
Excellent good compressive strength

APPLICATION AREAS

Metal forming tools
Sheet metal stamping
Fixtures and gauges
Car fixture
Foam molds

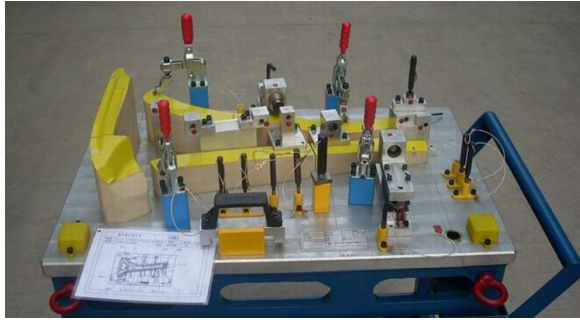

TECHNICAL DATA

Color:	beige/green	
Density:	1.7	g/cm ³
Shore D:	89	
Coefficient of thermal expansion:	34	x 10 ⁻⁶ K ⁻¹
Temperature resistance:	85	°C
Compressive strength:	106.3	N/mm ²
Flexural strength:	88.1	N/mm ²
Tensile Strength	39.6	N/mm ²

- Contains no halogens, plasticizer or solvent
 - Manufactured fluorocarbohydrate-free
 - Physiologically harmless
-

DIMENSIONS

750 x 500 x 35 mm	1000 x 500 x 35 mm
750 x 500 x 50 mm	1000 x 500 x 50 mm
750 x 500 x 60 mm	1000 x 500 x 60 mm
750 x 500 x 75 mm	1000 x 500 x 75 mm
750 x 500 x 100 mm	1000 x 500 x 100 mm

Other dimensions available on request.

STORAGE/TRANSPORT

LH-tool® boards should be stored on a flat and dry place at a temperature of 18°C-25°C. Temperature variations should be avoided during transport and storage.

Guangzhou LiHong Mould Material Co., Ltd

Tel: +86 (20)3663 6366 Fax: +86 (20)3663 1511 Email: gz_lihong@126.com www.tooling-board.com

Addr: No 19 Baitai Road, Taihe Town, Baiyun District, Guangzhou, China, 510540